

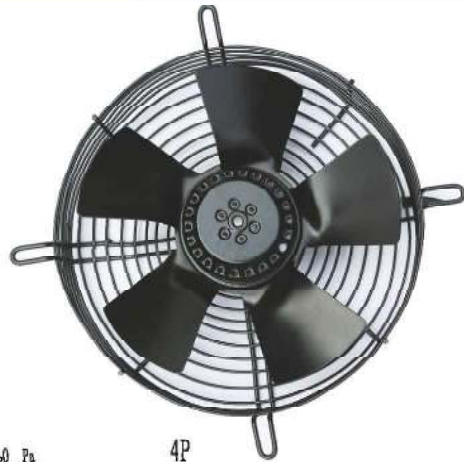


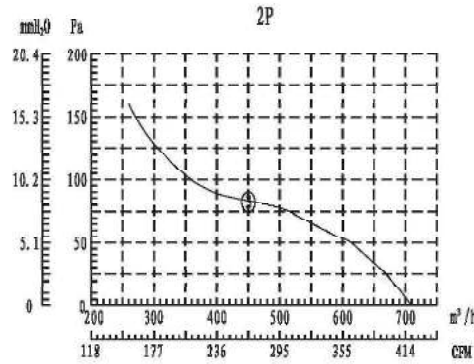


- 防护等级：IP54
Type of protection: Ip54
- 绝缘等级：“B” “F”
Insulation class: “B” “F”
- 工作方式：S1
Mode of operation: S1
- 轴承：免维护轴承
Bearings: Maintenance-free bearings

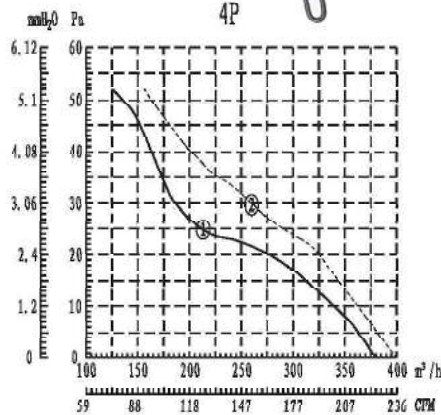


技术参数 Technical data

型号 Model	曲线 Curve NO.	额定电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Power Input	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 Air Volume	允许静压 Max static Pressure	净重 N.W.
	#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa		Kg
YWF4D-200-BSZ	①	380	50	0.15	30	1450	50	/	385 / 30		2.0
YWF4B-200-BSZ	①	220	50	0.11	22	1400	50	2.5	385 / 30		2.0
	②	230	60	0.11	25	1700	52	2.5	405 / 40		2.0
YWF2D-200-BSZ	③	380	50	0.25	65	2500	65	/	710 / 80		2.0
YWF2B-200-BSZ	④	220	50	0.25	55	2680	65	3	710 / 80		2.0

表中参数如有更改恕不另行通知 We will not inform you if we change the data in the form


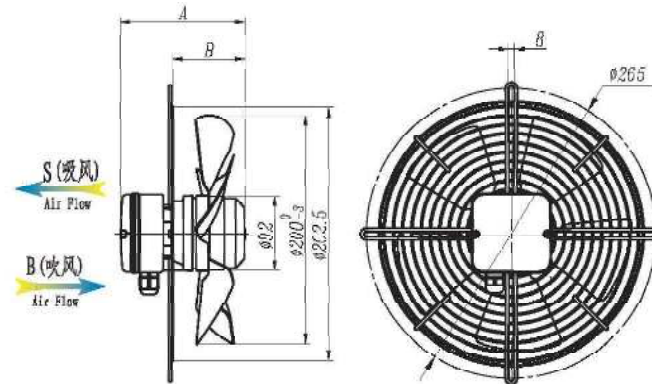


型号 MODEL	尺寸 A B	
	A	B
YWF4D (E)-200S (B)-BSZ	140	75
YWF2D (E)-200S (B)-BSZ	145	80


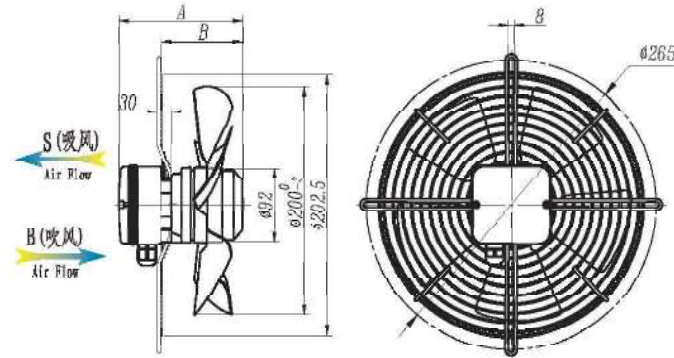


型号 MODEL	尺寸 A B	
	A	B
YWF4D (E)-200S (B)-CSZ	140	105
YWF2D (E)-200S (B)-CSZ	145	110



Model NO. B	Model NO. C	Model NO. D	Model NO. E	Model NO. H	Model NO. G	Model NO. K
YWF4D (E)-200S (B)-BSZ	YWF4D (E)-200S (B)-CSZ	YWF4D (E)-200S (B)-BSZ	YWF4D (E)-200S (B)-BSZ	YWF4D (E)-200S (B)-BSZ	YWF4D (E)-200S (B)-BSZ	/
YWF2D (E)-200S (B)-BSZ	YWF2D (E)-200S (B)-CSZ	YWF2D (E)-200S (B)-BSZ	YWF2D (E)-200S (B)-BSZ	YWF2D (E)-200S (B)-BSZ	YWF2D (E)-200S (B)-BSZ	/

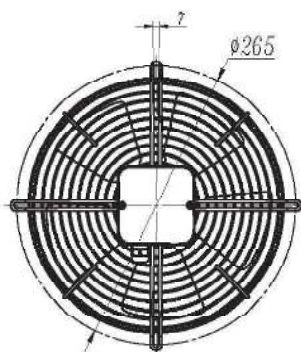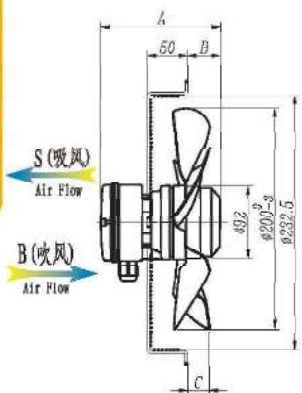


型号 MODEL	尺寸		
	A	B	C
YWF4D (B)-200S (B)-DSZ	140	29	17
YWF2D (B)-200S (B)-DSZ	145	34	22

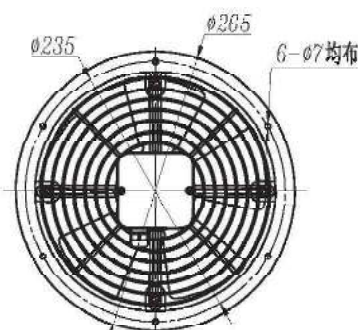



型号 MODEL	尺寸
YWF4D (B)-200S (B)-HSZ	47
YWF2D (B)-200S (B)-HSZ	42

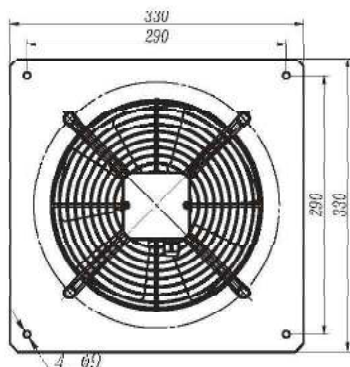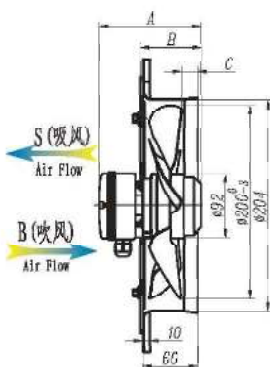

型号 MODEL	尺寸		
	A	B	C
YWF4D (B)-200S (B)-GSZ	140	82	6
YWF2D (B)-200S (B)-GSZ	145	87	6.5

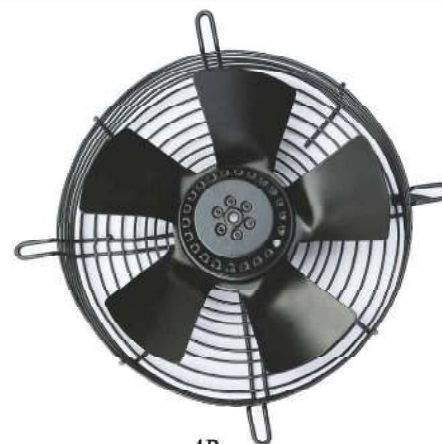

- 防护等级：IP54
Type of protection: IP54
- 绝缘等级：“B” “F”
Insulation class: “B” “F”
- 工作方式：S1
Mode of operation: S1
- 轴承：免维护轴承
Bearings: Maintenance-free bearings

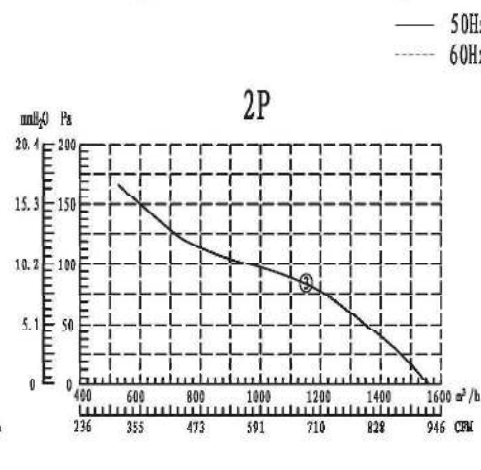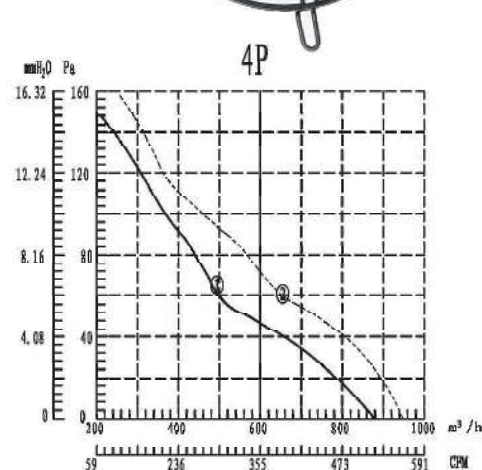

技术参数 Technical data

型号 Model	曲线 Curve NO.	额定电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Power input	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 Air Volume	允许静压 Max. static Pressure	净重 N.W.
	#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa		Kg
YWF4D-250-DSZ	①	380	50	0.2	50	1400	55	/	880 / 60		2.7
	②	400	60	0.25	60	1500	58	/	925 / 68		2.7
YWF4D-250-BSZ	①	220	50	0.23	50	1430	55	1.5	880 / 60		2.7
	②	230	60	0.22	55	1700	58	1.5	925 / 68		2.7
YWF2D-250-DSZ	③	380	50	0.28	130	2550	72	/	1565 / 120		2.8
	④	220	50	0.41	90	2720	75	4	1565 / 120		2.8

• 表中参数如有更改恕不另行通知 We will not inform you if we change the data in the form